

# Canteen Wastewater Treatment








※ Apply to Canteen of the factories.

## Merit

- 1) Improve oil removal efficiency
- 2) Reduce SS and organic matter

O&G 600 mg/L  
pH 5 - 7  
BOD 1200 mg/L  
COD 2000 mg/L  
SS 300 mg/L

Canteen WW

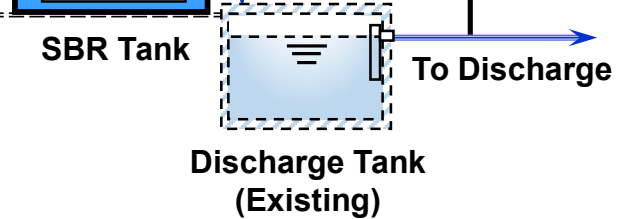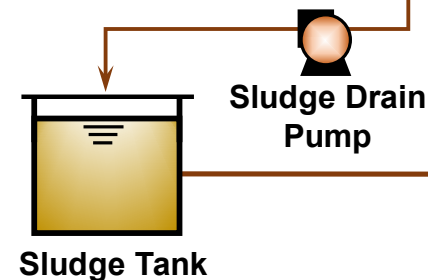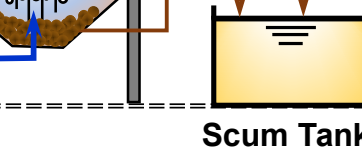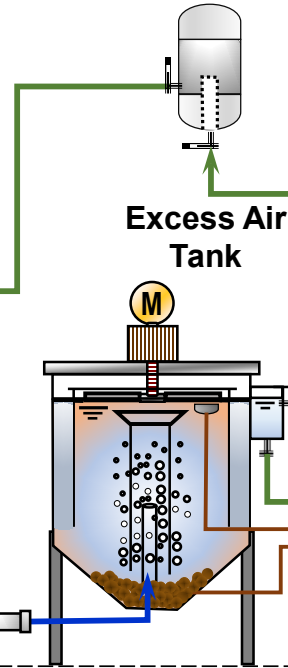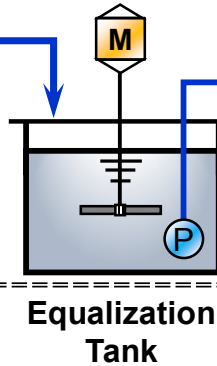

O&G  $\leq 5$  mg/L  
pH 5.5 - 9  
BOD  $\leq 20$  mg/L  
COD  $\leq 120$  mg/L  
SS  $\leq 50$  mg/L

Model	1	2	3
Capacity (m <sup>3</sup> /d)	4	12	20
Persons	200	600	1000



Goshu Kohsan Co., Ltd.